

Tweeter

GZUT 28SQ




Main Features

- High-quality SQ tweeter
- 28 mm / 1.1" CCA voice coil
- Coated silk dome
- Incl. flush mount housing
- Gold-plated connectors
- Hexagon style protection grill
- GZTH 25-28B angled surface mount housing (available separately)

Art.nr 32123012

Frequency response / impedance

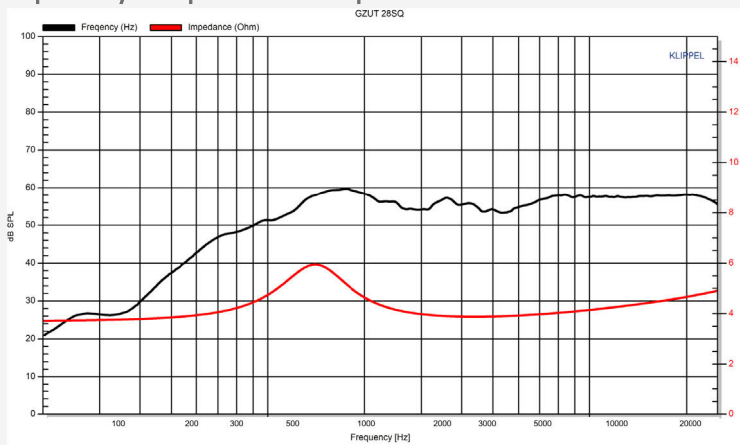

Audio Parameters (TSP)


Efficiency (SPL)	90 dB ± 2 dB (1 W / 1 m)
F _s	1300 Hz
Impedance	4 Ω ± 10%

Specifications

Nominal diameter	28 mm / 1.1"
Frequency response	2500 Hz – 25 kHz (-3 dB)
Magnet system	Neodymium
Cone material	Coated silk
Rec. high pass freq.	> 3000 Hz (12 dB/oct.)
Speaker terminal	Lead wire connectors
Impedance (nominal)	4 Ω
Max. power handling*	80 Watts max.
Cont. power handling*	130 Watts RMS
Protection grill	Hexagon style

*using the recommended high pass crossover

Dimensions

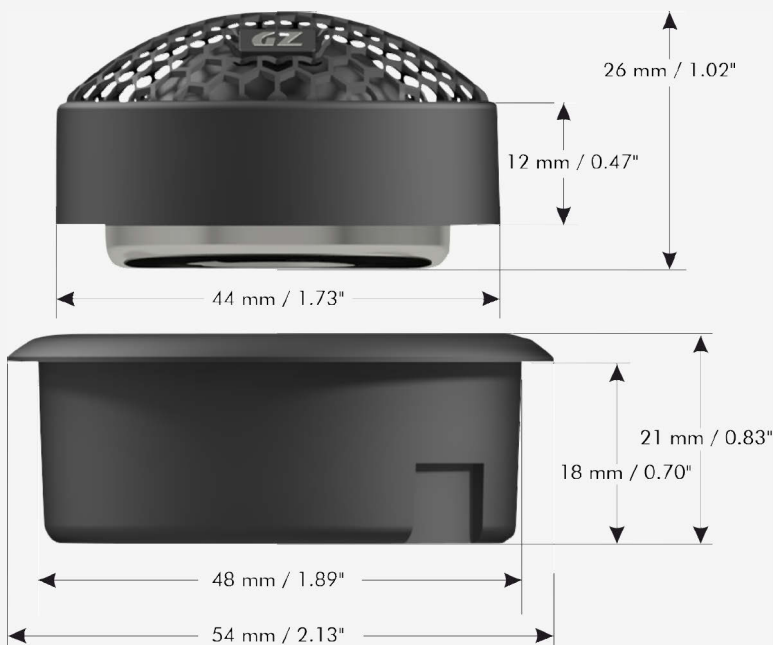

Accessories



GZTH 25-28B
angled surface housing
(available separately)